


Part No: 5A244-E-350
Description: 4PR/24 SOLID BARE COPPER CAT 5E 350MHZ CABLE



Type	COMMUNICATIONS CABLE TYPE CMR/FT4 4PR/24 SOLID BARE COPPER CAT 5E 350MHZ CABLE	
Specification	UL444 / CSA C22.2#214	
Conductor		
Conductor material	BC	
Conductor Construction (mm)	4P*0.49±0.01	
Insulation		
Insulation material	HDPE	
Insulation diameter(mm)	0.90±0.1	
Nom. Average Thickness (mm)	0.20	
Color	Pair 1: Blue – White/Blue Pair 2: Orange – White/Orange Pair 3: Green – White/Green Pair 4: Brown – White/Brown	
Rip-cord		
Rip-cord	Yes	
Jacket		
Jacket material	PVC	
Jacket Diameter(mm)	5.00±0.2	
Nom. Average Thickness (mm)	0.50	
Color	BLUE	
Electrical & Physical Characteristics:		
Conductor DCR 20°C	≤93.8 Ω /km	
Characteristic Impedance (Ohm)	100 ± 15 Ω	
Flame Test	CMR / FT4	
Operating Temperature Range	-20°C ~ +75°C	
Installation temperature	0°C ~ +60°C	
Permanent link transmission performance(90M)		

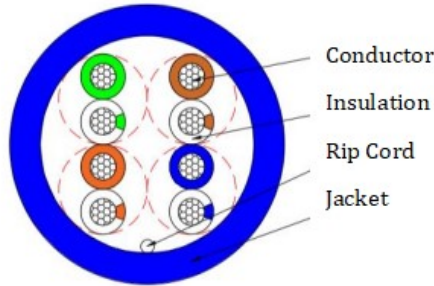