


DH-IPC-HDW2441TMP-S-0280B

Dahua



Dahua DH-IPC-HDW2441TMP-S-0280B. Dahua WizSense IP Dome. 4MP@20ips, Smart H.265+. ICR, 0.008/0.0008 lux, Smart IR 30m. 2.8mm fixed optics. WDR 120dB, 3D-NR, 4 ROI. Perimeter protection. Built-in microphone. MicroSD slot, RJ45, Onvif, IP67, 3AXIS, PoE. Dh-ipc-hdw2441tmp-s-0280b.

- 4 megapixel 1/2.9" CMOS sensor
- Compression formats: Smart H.265+, Smart H.264+, H.265, H.264, MJPEG
- Digital resolution: 4MP (2688x1520), 3.6MP (2560x1440), 3MP (2304x1296), 1080P (1920x1080), 1.3MP (1280x960), 720P (1280x720), D1 (704x576), VGA (640x480), CIF (352x288)
- Stream 1: 4MP (1~20 fps), 3.6MP (1~25/30 fps)
- Stream 2: D1 (1~25/30 fps)
- Day/night mode with removable mechanical filter
- Smart IR: 1 led, range 30 meters
- 0.008 lux F1.6 (color), 0.0008 lux F1.6 (B/W), 0 lux IR On
- 2.8 mm fixed optics
- Angle of view: 95°(H), 52°(V), 114°(D)
- Imaging modes: BLC, HLC, WDR 120dB, 3D-NR, Mirror.
- White balance with 6 modes
- Automatic and manual gain control
- Supports 4-zone videosensor, 4 regions of interest (ROI) and 4-zone privacy masking
- Perimeter protection with cross-line detection and intrusion detection (both modes support human/vehicle classification)
- SMD Plus
- Built-in microphone
- MicroSD card slot up to 256GB (not included)
- Network interface: RJ45 (10/100 Base-T)
- Network protocols: IPv4, IPv6, HTTP, TCP, UDP, ARP, RTP, RTP, RTSP, RTCP, RTMP, SMTP, FTP, SFTP, DHCP, DNS, DDNS, NTP, Multicast, ICMP, IGMP
- ONVIF (Profile S/T), CGI, P2P, Milestone, SDK and API support
- Up to 6 users
- Remote viewing via IE, Chrome and Firefox browsers

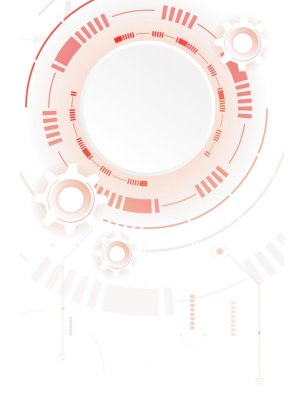

- DSS, DMSS management software
- Compatible with IOS and Android mobile devices
- Power supply: 12V DC / PoE (802.3af)
- Power consumption: 4.2W (12V) / 5.1W (PoE)
- Storage temperature from -40°C ~ +60°C
- Operating temperature from -40°C ~ +60°C
- Relative humidity: ≤95%.
- IP67 degree of protection
- Metal housing
- Dimensions: Ø121.9 x 99.1 (H) mm
- Net weight: 480 g
- Gross weight: 680 g
- 3AXIS: 0°~360°(PAN), 0°~78°(TILT), 0°~360°(Rotation)

- DAHUA-022